


Topakustik Classic

28/4 M or T

TOP(A)K(U)S(T)I(K) 

Acoustic panel solutions



formerly: TOPAKUSTIK 28/4 M or T

These grooves are the ideal solution for standard absorption requirements. As with all centre-to-centre distances, the wide grooving also comes with 2 mm, 3 mm and 4 mm grooves.



Planks

Thanks to the precise tongue and groove connection, planks result in an attractive surface with a joint-free appearance, because the connecting joint matches the dimension of the grooves. The planks permit simple and flexible assembly. They can be installed by stapling to a timber batten or clamping to a H/T-bar with turning-clips.

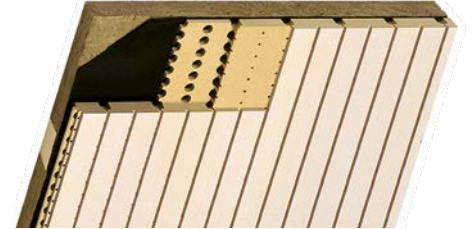

Normally flammable D-s2,d0 / CH RF 3



2780 x 128	2780 x 128	2780 x 128
3640 x 128		
4080 x 128	4080 x 128	

Flame retardant B-s1,d0 / CH RF 2



2780 x 128	2780 x 128	2780 x 128
3640 x 128		
4080 x 128	4080 x 128	

RESAP® core panel, non-combustible



2540 x 128	2540 x 128
3080 x 128	3080 x 128

Standard

Custom lengths are also available



Panels

Panels are used for removable or fixed ceilings and walls with visible joints. Panels can be provided with a number of different edges and are also suited for cabinet fronts and room dividers.

Normally flammable D-s2,d0 / CH RF 3



4080 x 1216	3640 x 1216	4080 x 1216
ideal = means optimal use of MDF core – custom lengths are also available		
2040 x 992 / 640	2040 x 992 / 640	2040 x 992 / 640
2780 x 992 / 640	2780 x 992 / 640	2780 x 992 / 640
3640 x 640	3640 x 640	

Flame retardant B-s1,d0 / CH RF 2



4080 x 1216	3640 x 1216	4080 x 1216
ideal = means optimal use of MDF core – custom lengths are also available		
2040 x 992 / 640	2040 x 992 / 640	2040 x 992 / 640
2780 x 992 / 640	2780 x 992 / 640	2780 x 992 / 640
3640 x 640		


RESAP® core panel, non-combustible



3080 x 1216	3080 x 1216
1540 x 608	1540 x 608
2540 x 608	2540 x 608
3080 x 608	3080 x 608


28/4 M-7.5%

αw	Euro	NRC
0.55 LM	D	0.78
0.55 M	D	0.72




28/4 M-3.75%

αw	Euro	NRC
0.50 LM	D	0.63
0.55 LM	D	0.69



28/4 T

αw	Euro	NRC
0.25 LM	E	0.41
0.25 LM	E	0.47



Sound absorption data acc. to ISO 354

Suspension height:

— approx. 216 mm

..... approx. 46 / 56 mm

with acoustic fleece and Mineral wool 30 mm (60 kg/m³)