


Topakustik Classic


6/2 M or T

TOP(A)K(U)S(T)I(K) 

Acoustic panel solutions


formerly: TOPAKUSTIK 6/2 M or T

Compared to wider grooves, this grooving is less visible as the interplay of light and shadow appears constant due to the narrow groove spacing and therefore appears more flat. The narrow grooves require perfect assembly, as even the smallest differences in the surface are visible.

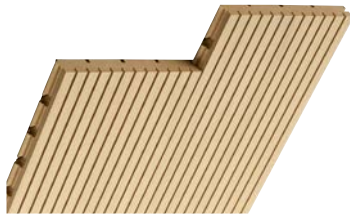

Planks

Thanks to the precise tongue and groove connection, planks result in an attractive surface with a joint-free appearance, because the connecting joint matches the dimension of the grooves. The planks permit simple and flexible assembly. They can be installed by stapling to a timber batten. Installation with turning-clip is only possible with thickness of 19/20mm.

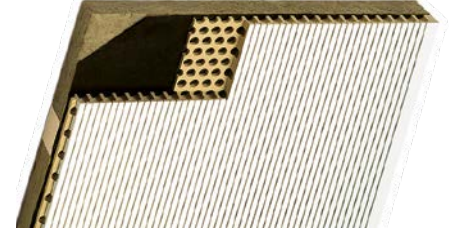

Normally flammable D-s2,d0 / CH RF 3



2780 × 128	2780 × 128	2780 × 128
3640 × 128		
4080 × 128	4080 × 128	

Flame retardant B-s1,d0 / CH RF 2



2780 × 128	2780 × 128	2780 × 128
3640 × 128		
4080 × 128	4080 × 128	

RESAP® core panel, non-combustible



2540 × 128	2540 × 128
3080 × 128	3080 × 128

Custom lengths are also available



Panels

Panels are used for removable or fixed ceilings and walls with visible joints. Panels can be provided with a number of different edges and are also suited for cabinet fronts and room dividers.

Normally flammable D-s2,d0 / CH RF 3



maximal		
4080 × 1216	3640 × 1216	4080 × 1216
ideal = means optimal use of MDF core – custom lengths are also available		
2040 × 992/ 640	2040 × 992/ 640	2040 × 992/ 640
2780 × 992/ 640	2780 × 992/ 640	2780 × 992/ 640
3640 × 640	3640 × 640	

Flame retardant B-s1,d0 / CH RF 2



maximal		
4080 × 1216	3640 × 1216	4080 × 1216
ideal = means optimal use of MDF core – custom lengths are also available		
2040 × 992/ 640	2040 × 992/ 640	2040 × 992/ 640
2780 × 992/ 640	2780 × 992/ 640	2780 × 992/ 640
3640 × 640		


RESAP® core panel, non-combustible



1540 × 608	1540 × 608
2540 × 608	2540 × 608
3080 × 608	3080 × 608


6/2 M-7%

αw	Euro	NRC
0.85 M	B	0.91
0.80 M	B	0.86



6/2 T

αw	Euro	NRC
0.40 LM	D	0.57
0.40 LM	D	0.62



Sound absorption data acc. to ISO 354

- approx. 216 mm
- ⋯ approx. 56 mm

with acoustic fleece and Mineral wool 30 mm (60 kg/m³)